

ECM Mobile cooler

Energy efficient cooling of people and buildings

Meets all European safety regulations

Cabinets are UV stabilised and corrosion free

Simple, safe and low cost

Environmentally friendly cooling

Lower capital cost than air conditioning

Ecocoolers consume 85% less electricity than conventional air conditioning systems



“Taylor” made solutions from the company with the know - how



Evaporative cooling / ECM Mobile cooler Product range information:

Producing a flow rate of up to 7,000m³/hr this evaporative cooler is manufactured in an ISO 9002 quality environment. Designed to meet all European electrical, water and other safety legislation.

Cabinet: The cabinet components are stainless steel.

Cooling pads: Cooling pads are Munters Celdek honeycomb, saturation efficiencies in the range of 85-89 % Munters CelDek 680x850x100mm, three pads total area 1.7m²

Visit us online:

www.harrytaylor.co.uk

ECM Mobile cooler

Energy efficient cooling of people and buildings

Producing a flow rate of up to 7,000m³/hr this evaporative cooler is manufactured by Harry Taylor Ltd in an ISO 9002 quality environment. Designed to meet all European electrical, water and other safety legislation.

Cabinet: The cabinet components are stainless steel.

Cooling pads: Cooling pads are Munters Celdek honeycomb, saturation efficiencies in the range of 85-89 % Munters CelDek 680x850x100mm, three pads total area 1.7m²



Mounted on four braked castors the cooler is designed to be operated on a flat surface in a well ventilated area. A double deflection grill allows the air to be directed.

A two speed fan, together with the option of cooling or vent mode, gives flexibility to respond to cooling needs.

- > All stainless steel construction
- > CelDEK pads – High efficiency 85%
- > Quality double deflection grill
- > Easy clean
- > High air flow
- > Easy drain – facility for gravity or pumped drain
- > Easy maintain and Repair
- > Duct connection facility
- > Single phase, two speed 700W motor
- > Direct drive- no belts or pulleys
- > Low profile- can fit through single door
- > Safe – fully guarded
- > Humidifier option
- > Built in lifting handles
- > Built in tie down points
- > Strong castors, two fixed, two swivel/brake
- > Electronic pump Run dry
- > 2 year warranty
- > Fully draining sloping sump
- > 90L sump
- > Low voltage controls
- > IP65 main control box

Water: Manual fill or mains supply. (1 bar max 7 bar. Minimum supply 300 L/hr. Sump Capacity 90L

Electrical supply: 240V 50Hz. 6A start 3A running.

Circulation pump: 50W 30L/min, Centrifugal, Encapsulated, Shaded Pole. Magnetically Coupled, Auto reset overload.


Warranty: Two years: parts only

Harry Taylor Southern office:
Kitsons Works, Aylesbury Road,
Bromley, Kent,
BR2 0QZ, UK

Southern office tel: 020 8464 0915
southernoffice@harrytaylor.co.uk

Harry Taylor Northern office:
Guide Bridge Mill, South Street,
Ashton - under - Lyne, Lancs,
OL7 0HU, UK

Northern office Tel: 0161 308 4550
northernoffice@harrytaylor.co.uk

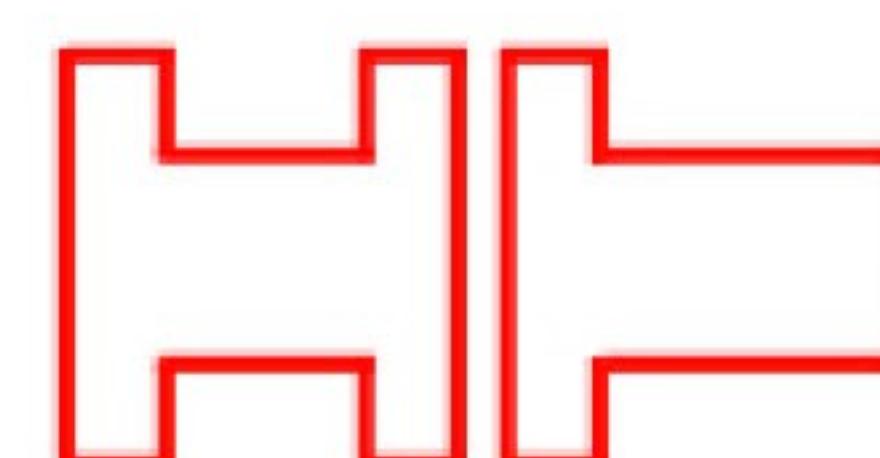

Harry Taylor
www.harrytaylor.co.uk